

Union Bonnet Needle Valves

SUNV Series

Features

- Compact design
- Low operating torques
- Panel mountable
- Straight and angle flow patterns
- Non rotating vee stem tip
- Three stem type are available




Specifications

Temperature Ratings	PCTFE Stem Tip : -65°F to 200°F (-53°C to 93°C)
	PTFE Packing : -65°F to 450°F (-53°C to 232°C)
	PEEK Packing : -65°F to 600°F (-53°C to 315°C)
	Graphite Packing : -65°F to 1200°F (-53°C to 648°C)
Orifice Size	From 0.156" to 0.437" (4mm to 11mm)
Flow Coefficients (Cv)	From 0.35 to 2.2
End Connection Size	From 1/4" to 1", 6mm to 25mm


Pressure - Temperature Ratings					
Material Group	2.2	3.4	3.1	3.5	3.8
Material	316 SS	Alloy 400	Alloy 20	Alloy 600	Alloy C-276
Temperature, °F(°C)	Working Pressure, psig (bar)				
-20 (-28) to 100 (37)	6000 (413)	5000 (344)	5000 (344)	6000 (413)	6000 (413)
200 (93)	5160 (355)	4400 (303)	4640 (319)	5600 (385)	6000 (413)
250 (121)	4910 (338)	4260 (293)	4500 (310)	5460 (376)	6000 (413)
300 (148)	4660 (321)	4120 (283)	4360 (300)	5320 (366)	6000 (413)
350 (176)	4470 (307)	4050 (279)	4185 (288)	5220 (359)	5975 (411)
400 (204)	4280 (294)	3980 (274)	4010 (276)	5120 (352)	5880 (405)
450 (232)	4130 (284)	3970 (273)	3955 (272)	5030 (346)	5710 (393)
500 (260)	3980 (274)	3960 (272)	3900 (268)	4940 (340)	5540 (381)
600 (315)	3760 (259)	-	3790 (261)	4780 (329)	5040 (347)
650 (343)	3700 (254)	-	3750 (258)	4700 (323)	4905 (337)
700 (371)	3600 (248)	-	3710 (255)	4640 (319)	4730 (325)
750 (398)	3520 (242)	-	3665 (252)	4430 (305)	4430 (305)
800 (426)	3460 (238)	-	3600 (248)	4230 (291)	4230 (291)
850 (454)	3380 (232)	-	-	4060 (279)	4060 (279)
900 (482)	3280 (225)	-	-	3745 (258)	3745 (258)
950 (510)	3220 (221)	-	-	2725 (187)	3220 (221)
1000 (537)	3030 (208)	-	-	1800 (124)	3030 (208)
1050 (565)	3000 (206)	-	-	1155 (79.5)	3000 (206)
1100 (593)	2685 (184)	-	-	770 (53.0)	2685 (184)
1150 (621)	2285 (157)	-	-	565 (38.9)	2285 (157)
1200 (648)	1715 (118)	-	-	515 (35.4)	1715 (118)

Flow Data at 100°F (37°C)

Regulating Stem Tip

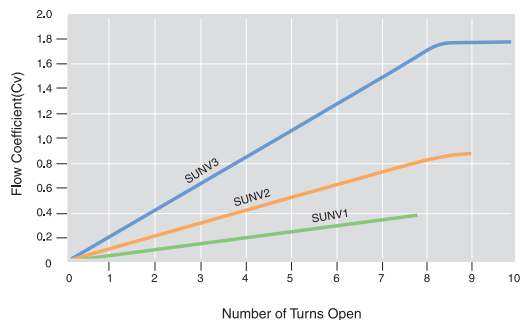


Vee and Soft Seat Stem Tip

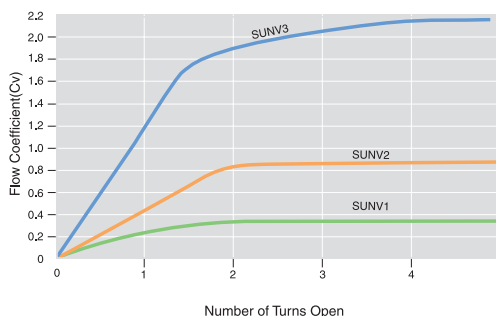

Testing

- Each and every Valve is tested with nitrogen at 1000psig (69bar).
- Valve have max allowable leak rate of 0.1 cm³/min.
- Shell testing is performed on demand.


Materials of Construction

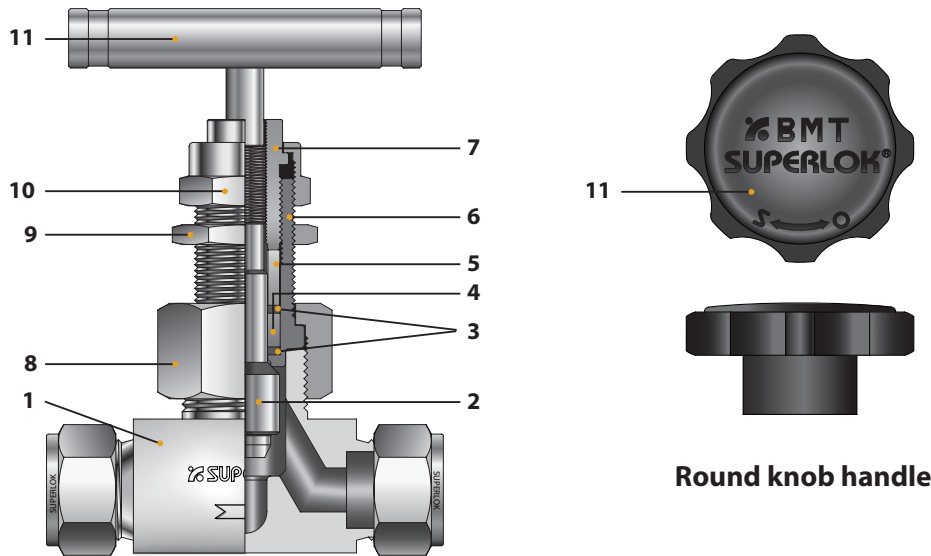

No.	Component	Material		
		Stainless Steel	Alloy 400	Alloy C-276
*1	Body	ASTM A479 Type316	ASTM B164	ASTM B574
*2	Non rotating vee stem	ASTM A276 Type316	ASTM B164	ASTM B574
	Regulating stem	ASTM A276 Type316	ASTM B164	ASTM B574
	Soft seat stem	ASTM A276 Type316 + PCTFE	ASTM B164 + PCTFE	ASTM B574 + PCTFE
*3	Packing support	Glass filled PTFE	Glass filled PTFE	Glass filled PTFE
*4	Packing	PTFE	PTFE	PTFE
5	Packing gland	ASTM A276 Type316	ASTM B164	ASTM B574
*6	Bonnet	ASTM A276 Type316	ASTM B164	ASTM B574
7	Packing bolt	ASTM A276 Type316	ASTM A276 Type316	ASTM A276 Type316
8	Union nut	ASTM A276 Type316	ASTM A276 Type316	ASTM A276 Type316
9	Panel nut	ASTM A276 Type316	ASTM A276 Type316	ASTM A276 Type316
10	Packing nut	ASTM A276 Type316	ASTM A276 Type316	ASTM A276 Type316
11	Bar handle	Stainless Steel		
	Round knob handle	Phenolic with brass insert		
	Set screw	Stainless Steel		

Wetted components are marked " * ".

Stem Type

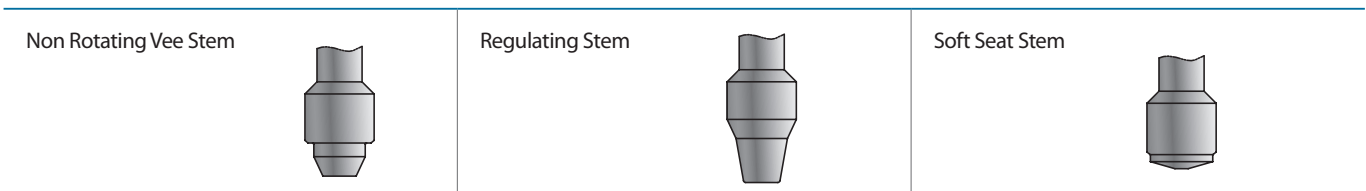


Packing

- PTFE packing is standard. PEEK and Graphite packing is optional.

Handle


- 316 stainless steel, alloy 400 and alloy C-276 body valve - Stainless steel bar handles are standard.
- Black round knob handles are optional. (SUNV1 and SUNV2 Series)
- Anodized black aluminum bar handles are optional.

SUNV Series

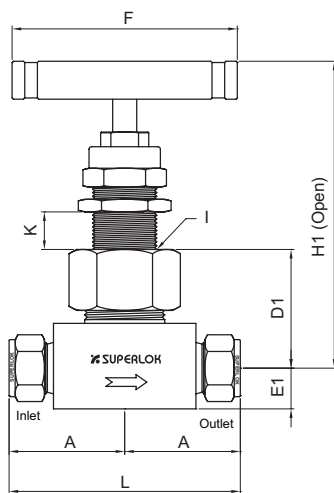

Straight Flow Pattern

SUNV A Series

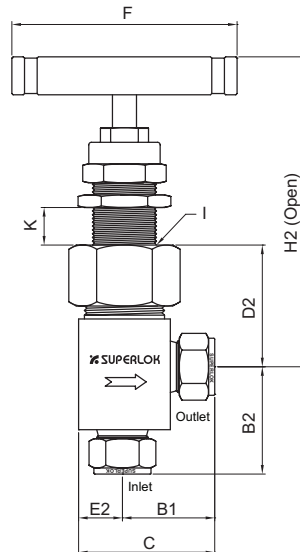

Angle Flow Pattern

- I : Panel Hole Drill
- J : Socket weld end connection depth
- K : Panel Mount Thickness
1/16" (1.6) min, 3/8" (9.5) max

Table of Dimensions

Order Number		Orifice (mm)	Cv	End Connections		Dimensions (mm)																		
Series	Part No.			Inlet	Outlet	L	A	B1	B2	C	D1	D2	E1	E2	F	I	H1	H2	J					
SUNV1	S4	4.0	0.35	1/4" SUPERLOK		62.0	31.0	29.4	37.3	38.9	27.8	27.8	9.9	9.9	45.0	15.1	77.8	77.8	-					
	S6M			6mm SUPERLOK		62.0	31.0	29.4	37.3	38.9		27.8								77.8				
	S8M			8mm SUPERLOK		62.0	31.0	29.4	37.3	38.9		27.8								77.8				
	M4N			1/4" Male NPT		50.8	25.4	25.4	25.4	35.0		32.6								82.6	-			
	F2N			1/8" Female NPT		50.8	25.4	23.0	25.4	32.6		32.6								82.6	-			
	F4N			1/4" Female NPT		52.4	26.2	23.0	25.4	32.6		32.6								82.6	-			
	M4N F4N			1/4" Male NPT	1/4" Female NPT	52.4	26.2	23.0	25.4	32.6		32.6								82.6	-			
	SW4T			1/4" Tube Socket Weld		46.0	23.0	22.3	30.2	31.8		27.8								77.8	7.2			
SUNV2	S6	6.0	0.86	3/8" SUPERLOK		73.0	36.5	32.5	42.9	45.3	34.1	31.0	12.7	12.7	64.0	19.9	93.7	96.9	-					
	S8			1/2" SUPERLOK		77.8	38.9	34.9	42.1	47.6		34.2								93.7				
	S10M			10mm SUPERLOK		73.0	36.5	33.3	39.7	46.1		34.2								93.7				
	S12M			12mm SUPERLOK		77.8	38.9	35.7	42.1	48.4		34.2								93.7				
	F4N			1/4" Female NPT		57.2	28.6	25.4	28.6	38.1		37.3								96.9				
	F6N			3/8" Female NPT		57.2	28.6	25.4	25.4	38.1		37.3								96.9				
	SW6T			3/8" Tube Socket Weld		57.2	28.6	25.4	28.6	38.1		37.3								93.7	8.0			
	SW8T			1/2" Tube Socket Weld		57.2	28.6	25.4	25.4	38.1		35.7								95.3	9.6			
	SW4P			1/4" Pipe Socket Weld		57.2	28.6	25.4	28.6	38.1		37.3								96.9	9.6			
	SUNV3			S8	11.0	2.2	1/2" SUPERLOK		100.0	50.0		43.7								53.2	61.1	46.0	47.6	15.9
S12		3/4" SUPERLOK		100.0			50.0	43.7	53.2	61.1	46.0	47.6	15.9	17.5	121.5	123.1								
S16		1" SUPERLOK		100.0			50.0	-	-	-	47.6	-	17.5	-	123.1	-								
S12M		12mm SUPERLOK		100.0			50.0	-	-	-	46.0	-	15.9	-	121.5	-								
F8N		1/2" Female NPT		79.4			39.7	33.3	39.7	50.8	46.1	50.8	15.9	17.5	121.5	126.2								
F12N		3/4" Female NPT		82.6			41.3	-	-	-	48.4	-	19.9	-	123.9	-								
F16N		1" Female NPT		92.1			46.0	-	-	-	54.0	-	25.4	-	129.4	-								
M8N F8N		1/2" Male NPT	1/2" Female NPT	79.4			39.7	33.3	39.7	50.8	46.0	50.8	15.9	17.5	121.5	126.2								
M12N F12N		3/4" Male NPT	3/4" Female NPT	82.6			41.3	-	-	-	48.4	-	19.9	-	123.9	-								
M16N F16N		1" Male NPT	1" Female NPT	92.1			46.0	-	-	-	54.0	-	25.4	-	129.4	-								
SW8T		1/2" Tube Socket Weld		79.4			39.7	33.3	42.9	50.8	46.0	47.6	15.9	17.5	121.5	123.1	9.6							
SW12T		3/4" Tube Socket Weld		79.4			39.7	-	-	-	46.0	-	15.9	-	121.5	-	11.1							
SW8P		1/2" Pipe Socket Weld		79.4			39.7	33.3	39.7	50.8	47.6	50.8	17.5	17.5	123.1	123.1	9.6							

* Dimensions based on SUPERLOK nuts finger-tight. Dimensions are reference only, subject to change.

Ordering Information

Inlet Outlet
SUNV1 - M4N - S4 - RS - GR - KH - SS
1 2 3 2 3 4 5 6 7

1. Valve Series

- Straight Flow Pattern
 - SUNV1: Orifice 4.0mm
 - SUNV2: Orifice 6.4mm
 - SUNV3: Orifice 11.0mm
- Angle Flow Pattern
 - SUNV1A: Orifice 4.0mm
 - SUNV2A: Orifice 6.4mm
 - SUNV3A: Orifice 11.0mm

2. End Connection Type

- S : SUPERLOK Tube Fitting
- M : Male Pipe Thread
- F : Female Pipe Thread
- SW : Socket Weld

3. End connection Size

■ Pipe Thread Designation

Size (inch)	1/8	1/4	3/8	1/2	3/4	1
Screwed NPT	2N	4N	6N	8N	12N	16N
Screwed BSPT	2R	4R	6R	8R	12R	16R

■ Tube O.D Designation

Tube O.D (inch)	1/4	3/8	1/2	3/4	1
Designation	4	6	8	12	16

Tube O.D (mm)	6	8	10	12	16	20	25
Designation	6M	8M	10M	12M	16M	20M	25M

4. Stem

- Blank : Non Rotating Vee Stem (Standard)
- RS : Regulating Stem
- SS : Soft Seat Stem

5. Packing

- Blank : PTFE Packing (Standard)
- PE : PEEK Packing
- GR : Graphite Packing

6. Handle

- Blank : Stainless Steel Bar Handle (Standard)
- KH : Black Round Knob Handle
- AH : Anodized Black Aluminum Bar Handle

7. Body Material

- SS : 316 Stainless Steel
- M40 : Alloy 400 (Monel)
- 276 : Alloy C-276 (Hastelloy)

■ Examples

- ex1) SUNV1 - S4 - 276
 - Straight flow pattern, Orifice 4.0mm/ Inlet: SUPERLOK 1/4" / Outlet: SUPERLOK 1/4" / Non rotating vee stem / PTFE Packing / Stainless steel bar handle / Hastelloy body
- ex2) SUNV2A - SW8T - RS - GR - SS
 - Angle flow pattern, Orifice 6.4mm/ Inlet: 1/2"Socket weld / Outlet: 1/2" Socket weld / Regulating stem / Graphite Packing / Stainless steel bar handle / 316 Stainless steel body
- ex3) SINV3 - M12N - F8N - SS
 - Straight flow pattern, Orifice 11.0mm/ Inlet: 3/4"NPT Male / Outlet: 1/2"NPT Female / Non rotating vee stem / PTFE Packing / Stainless steel bar handle / 316 Stainless steel body